

QMS/QPS41-2AL




Mechanical Switches	3A @ 250 VAC
Proximity Sensors	See ordering information
Magnetic Switches	See ordering information

Specification	Standard	Option
Enclosure Protection	IP67/NEMA 4/4x	Intrinsically Safe EEx ia IIC T6
Temperature Range	-20°C~+80°C (-4°F+176°F)	-40°C +85°C (-40°F+185°F)
Conduit Entries	2x ½" NPT	2x M20x1,5
Switches	2x mechanical switches SPDT 2x Proximity Sensors 2x Magnetic Switches	Gold plated contacts
Terminal	8-Points	—
External Coating	Black Epoxy Coating ElectroPolished Stainless Steel	—
Weight	1.76 lbs	—


Item	Material
Housing	Die Cast Aluminium AISI 316L Stainless Steel
Shaft	AISI 304 Stainless Steel (For All LSB) AISI 316 Stainless Steel (for SS LSB)
External Indicator	Polycarbonate
Indicator OPEN/CLOSED	ABS
Cams	ABS
Spring	Stainless Steel
O-ring	NBR
Bracket	AISI 304 Stainless Steel (For All LSB) AISI 316 Stainless Steel (for SS LSB)




UNIVERSAL 303SS
MOUNTING BRACKET

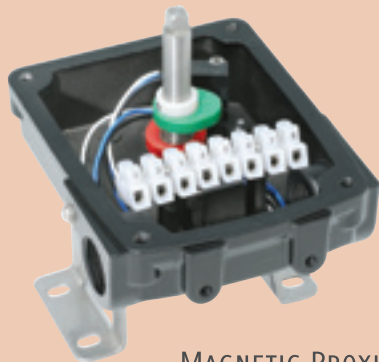

MAGNETIC PROXIMITY
QPS41-2AL

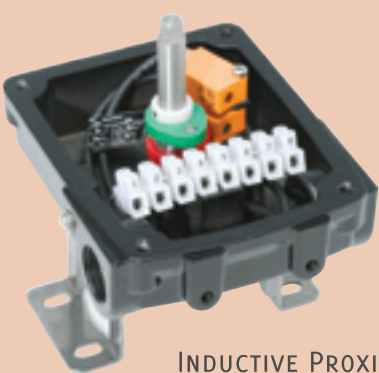

INDUCTIVE PROXIMITY
QPS41-2AL-IND

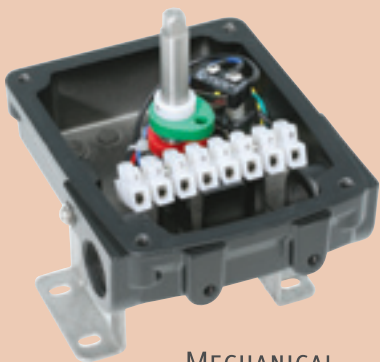

MECHANICAL
QMS41-2AL