
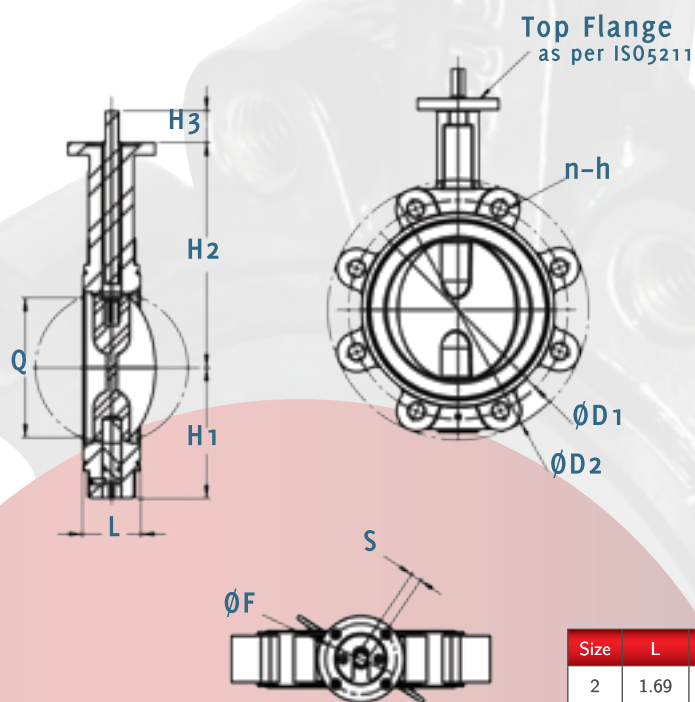


CAST IRON BFY VALVES 050/051 SERIES

THE CAST IRON BUTTERFLY VALVE WITH EXTENDED NECK COMES STANDARD WITH ANSI CLASS 125/150 FLANGES. THE LUG STYLE IS CAPABLE OF WITHSTANDING 200 PSI WITH BI-DIRECTIONAL, DEAD END SERVICE. UNDERCUT IS AN AVAILABLE OPTION.

Size	L	n-h	D1	D2	H1	H2	H3	S	Q	Flange
2	1.69	4-18mm	4.75	3.82	3.15	5.94	1.30	9mm	1.03	F05
2½	1.81	4-18mm	5.50	4.45	3.62	6.89	1.30	9mm	1.71	F05
3	1.81	4-18mm	6.00	4.92	3.74	7.13	1.30	9mm	2.46	F05
4	2.05	4-22mm	7.50	6.14	4.49	7.87	1.30	11mm	3.56	F07
5	2.20	4-22mm	8.50	7.36	5.00	8.39	1.30	14mm	4.35	F07
6	2.20	4-22mm	9.50	8.46	5.47	8.90	1.30	14mm	5.81	F07
8	2.36	4-22mm	11.75	10.51	6.89	10.24	1.85	17mm	7.66	F10
10	2.68	4-26mm	14.25	13.00	8.00	11.50	1.85	22mm	9.54	F10
12	3.07	4-26mm	17.00	14.96	9.53	13.27	1.85	22mm	11.69	F10

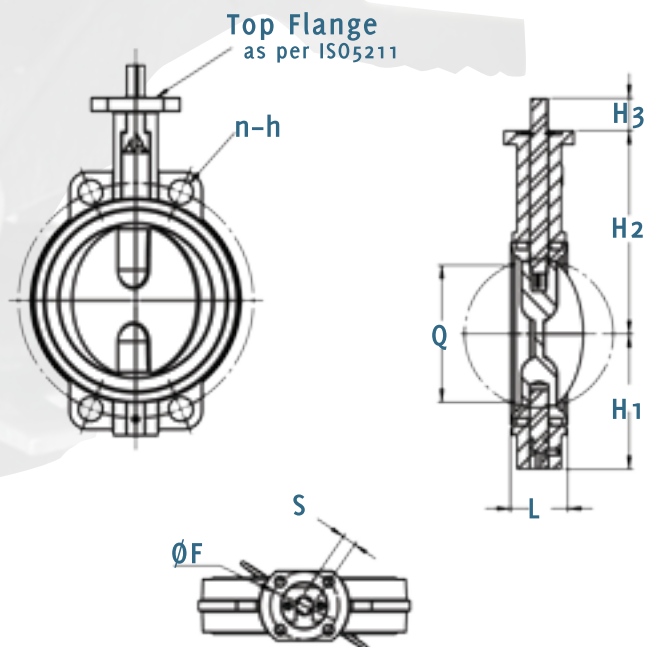

#051-LUG



#050-WAFER

PTFE COATED DISCS ALSO
AVAILABLE FOR INDUSTRIAL
BUTTERFLY VALVES

Size	L	n-M	D1	D2	H1	H2	H3	S	Q	Flange
2	1.69	4 x 5/8-11 UNC	4.75	5.95	3.15	5.94	1.30	9mm	1.03	F05
2½	1.81	4 x 5/8-11 UNC	5.50	6.97	3.62	6.89	1.30	9mm	1.71	F05
3	1.81	4 x 5/8-11 UNC	6.00	7.56	3.74	7.13	1.30	9mm	2.46	F05
4	2.05	8 x 5/8-11 UNC	7.50	8.35	4.49	7.87	1.30	11mm	3.56	F07
5	2.20	8 x 3/4-10 UNC	8.50	9.53	5.00	8.39	1.30	14mm	4.35	F07
6	2.20	8 x 3/4-10 UNC	9.50	11.02	5.47	8.90	1.30	14mm	5.81	F07
8	2.36	8 x 3/4-10 UNC	11.75	13.19	6.89	10.24	1.85	17mm	7.66	F10
10	2.68	12 x 7/8-9 UNC	14.25	15.35/15.94	8.00	11.50	1.85	22mm	9.54	F10
12	3.07	12 x 7/8-9 UNC	17.00	17.52/19.03	9.53	13.27	1.85	22mm	11.69	F10